


Manufactures Low Voltage Switchgears
 All Types of Micro Switches, Limit Switches & Foot Switches

BLS SERIES

CE IP-67

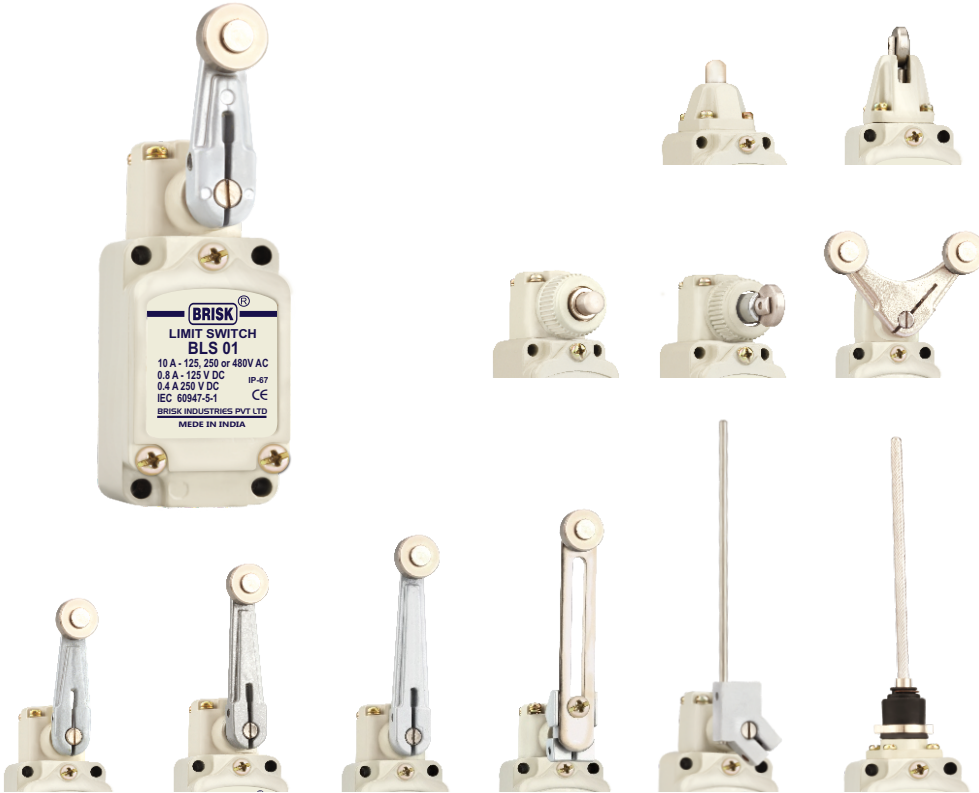

Features

- Compiling with IEC 60947-5-1
- Silver Contact
- Rugged & Highly Reliable design
- Quick make & break action
- Aluminium pressure die casting body
- Suitable for highly contaminated
- Atmospheres and vibration conditions

Technical Specification

Rating	: 10A /125, 250 or 480VAC 0.8A/ 125 VDC, 0.4A/ 250 VDC
Contact	: SPDT-DB
Body Material	: Aluminium pressure die casting
Contact Material	: Silver Cadmium Oxide
Terminal	: Brass

Ordering Code

BLS - 1

1. Actuators

- 01: Roller Lever with R 38
- 02: Roller Lever with R 50
- 03: Roller Lever with R 64
- 04: Roller Lever with R 76
- 05: Yoke Roller Lever
- 06: Adjustable Roller Lever
- 07: Adjustable Rod Lever
- 08: Top Plunger (Push Button)
- 09: Top Roller Plunger
- 10: Side Plunger (Push Button)
- 11: Side Roller Plunger
- 12: Wobble Lever

BEST SERIES

CE



Technical Specification

Rating	: 10A /125, 250 or 480VAC 0.8A/ 125 VDC, 0.4A/ 250 VDC
Contact	: SPDT-DB
Body Material	: Aluminium pressure die casting
Contact Material	: Silver Cadmium Oxide
Terminal	: Brass

Ordering Code

BEST - 1

1. Actuators

- 01 : Roller Lever with R 38 (Snap)
- 02 : Roller Lever with R 50 (Snap)
- 03 : Roller Lever with R 64 (Snap)
- 04 : Roller Lever with R 76 (Snap)
- 05 : Yoke Roller Lever (Snap)
- 06 : Adjustable Roller Lever (Snap)
- 07 : Adjustable Rod Lever (Snap)
- 08 : Top Plunger (Push Button) (Snap)
- 09 : Top Roller Plunger (Snap)
- 10 : Side Plunger (Push Button) (Snap)
- 11 : Side Roller Plunger (Snap)
- 12 : Wobble Lever (Snap)
- 13 P : With Push Rod (Normal)
- 13 PS: With Push Rod (Snap)
- 14 P : With Normal Roller Lever (Normal)
- 14 PS: With Normal Roller Lever (Snap)
- 15 P : With Angular Roller Lever (Normal)
- 15 PS: With Angular Roller Lever (Snap)